

Project Time Management

Prepared by Dr. Nael Zabel

Lecture 8

جامعة الجميع الذكية

تسعى لتكون الكيان الأول الذي يتبنى مبدأ المجتمع التعليمي
التعاوني ويقدم العلم مقابل العمل لتنمية وبناء المجتمعات.

PMG 212

Develop the Schedule



جامعة الجميع الذكية
EVERYONE'S SMART UNIVERSITY

Agenda

- Critical Path method
- Scheduling Terminology
- Estimate the duration
- Scheduling Consists of
- Develop the Schedule
- The common Scheduling Failures



- **Critical Path method**
- Scheduling Terminology
- Estimate the duration
- Scheduling Consists of
- Develop the Schedule
- The common Scheduling Failures



One or more continuous chains of **zero** or **negative** float activities running from the start event to the finish event in the schedule.

The Critical Path is normally the Longest Path (longest series of continuous activities) in the schedule.

Any activity on the critical path is called a **Critical Activity**.

The critical path method (CPM) is a technique that's used by project managers to create a project schedule and estimate the total duration of a project.

Activity	Duration
A	1
B	7
C	6
D	4
E	8
F	6
G	4
H	3
I	5
J	5
K	3
Sum	52


The CPM method, also known as critical path analysis (CPA), consists in using a network diagram to visually represent the sequences of tasks needed to complete a project.

Once these task sequences or paths are defined, their duration is calculated to identify the critical path, which determines the total duration of the project.



Lecture8

Critical Path method

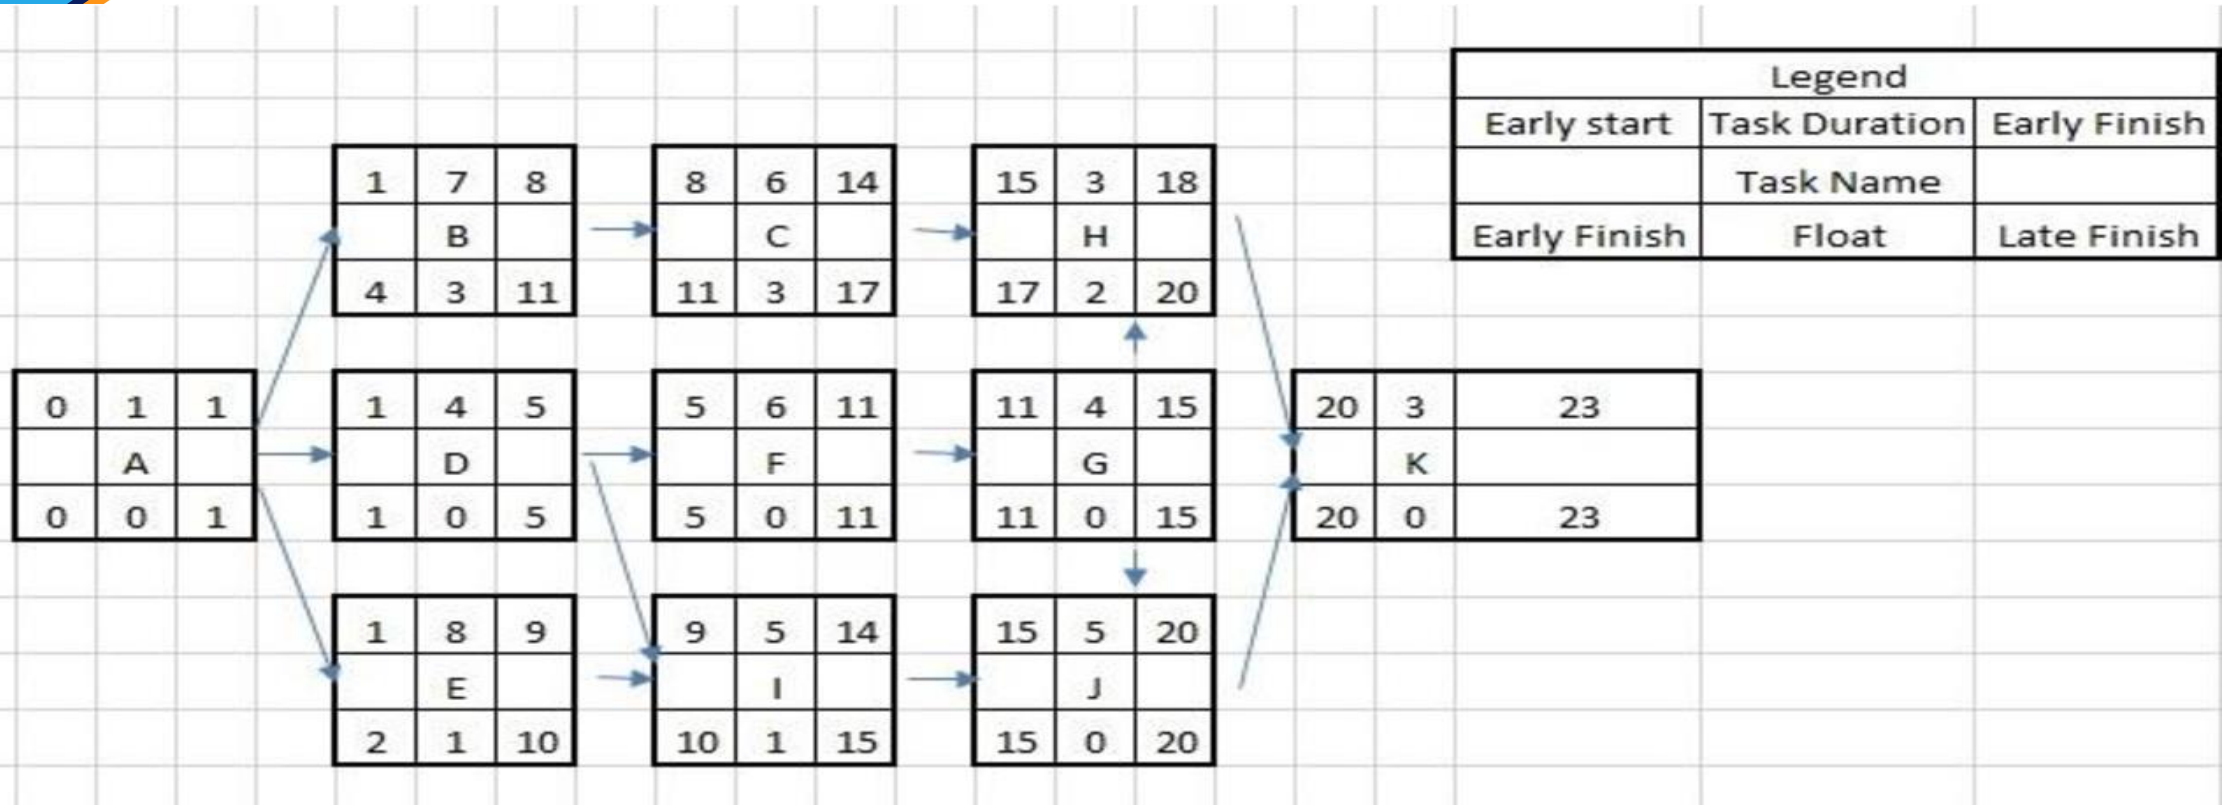

- Critical Path method
- **Scheduling Terminology**
- Estimate the duration
- Scheduling Consists of
- Develop the Schedule
- The common Scheduling Failures




Lead & Lag

Lead and Lag are the duration unit of tasks.

Lead is portrayed by negative (-) sign

whereas Lag is by positive (+) sign.

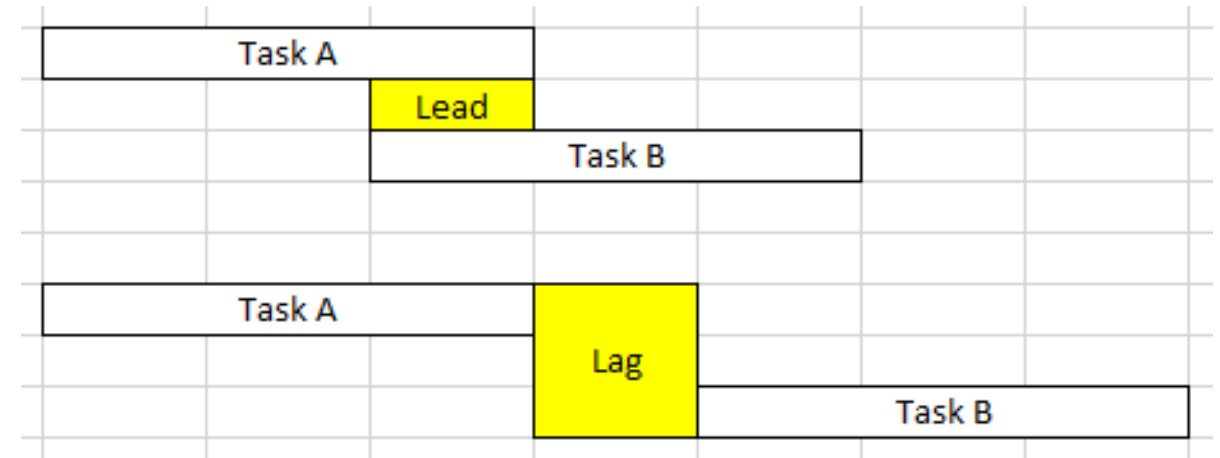

Float

Total Float

Amount of time an activity can exceed its early finish date without affecting the project end date or other imposed dates.

Free Float

Amount of time by which an activity can exceed its early finish date without affecting the early start date of any successor(s).

Negative Float

Amount of time that the start or finish of any activity exceeds the time allowed.




The disadvantages of showing float on the schedule

- End user may delay start of activity thinking there is slack time
- May cause false sense of security
- Once used as an activity -- it's gone forever
- Assumes CPM is complete with correct logic

Duration - Original / Remaining

Duration: is the amount of time required to complete an activity.

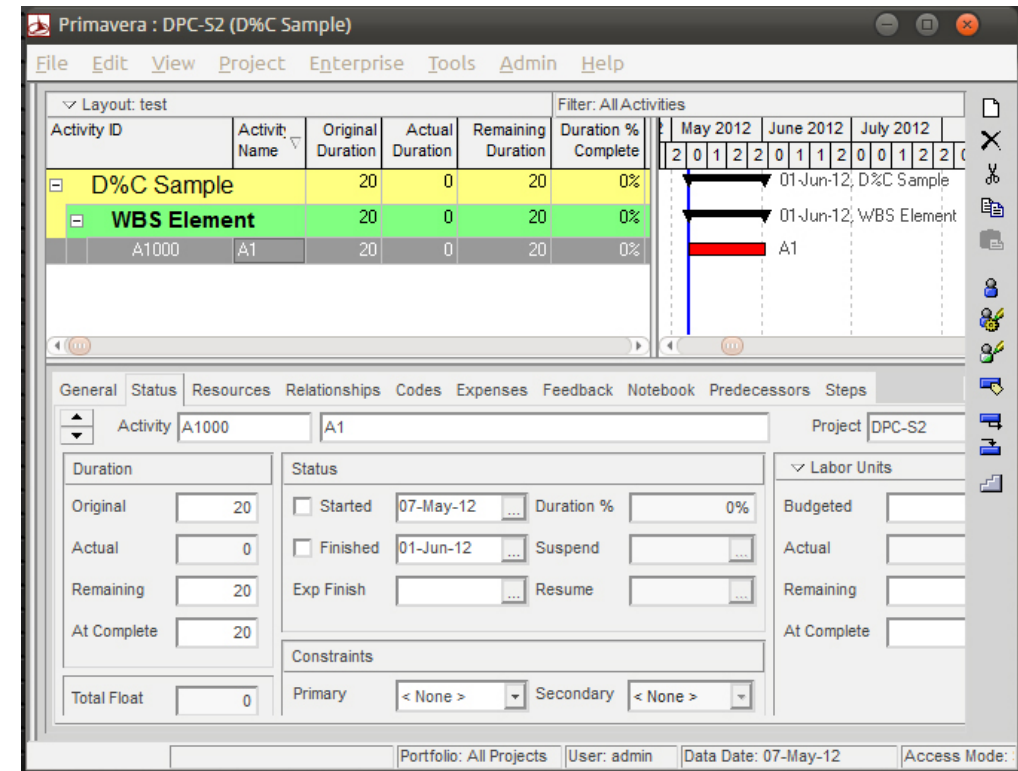

Original Duration - the planned estimate of the number of work periods required to accomplish an activity.

Remaining Duration - the number of work periods currently forecast to complete the activity.

Work periods can be hours, days, weeks or months.

- Critical Path method
- Scheduling Terminology
- **Estimate the duration**
- Scheduling Consists of
- Develop the Schedule
- The common Scheduling Failures



- Historical information
- Market information
- Rates of installation
- What is a “Normal” rate of installation? How do we come up with this?
Varies by area?

The work periods and holidays defined for the Project.

There can be **multiple Calendars** on a Project:

- Engineering - 5 day work week
- Manufacturing - 7 day work week
- Construction - 6 day work week
- Different local Holidays ?

Project assumptions are identified at the beginning of the project. Throughout the project life cycle, they will be refined and reanalyzed.

An assumption is what you believe to be true. These are anticipated events or circumstances that are expected during your project's life cycle. You make assumptions based on your experience or the information available on hand.

Project Constraints are identified at the beginning of the project.
Throughout the project life cycle, they will be refined and reanalyzed.

These constraints are defined at the beginning of your project, and you must work within their boundaries.

A constraint can be of two types:

business Constraints

Technical Constraints



- Critical Path method
- Scheduling Terminology
- Estimate the duration
- **Scheduling Consists of**
- Develop the Schedule
- The common Scheduling Failures



Scheduling Consists of

- Determining the **activity duration's**.
- **Ties** individual plans together.
- **Timing** of activities.
- Minimizing **resource conflicts**.
- Identifying **critical** activities.

Scheduling Consists of

- Establishing the **baseline**.
- Providing a **tool** for project **evaluation**.
- Provides outputs for **analysis**.
- **Monitoring** and analyzing progress.
- Assists in developing **work-arounds**

- Information outlining the project is available in many forms and from many sources
- From the project scope description look for similar projects
- The Client - gather as much information about this Project and other similar Projects in which they have been involved.

Asking about these simple questions

- **What** are you **going to do**?
- **How long** is it **going to take**?
- **What** do you need **to start** the activity?
- **What** do you need **to finish** the activity?

- Critical Path method
- Scheduling Terminology
- Estimate the duration
- Scheduling Consists of
- **Develop the Schedule**
- The common Scheduling Failures



- **Integrate** individual plans
- Identify **activities**
- Determine activity **duration**
- Determine activity **sequence**
- Establish dependencies and **constraints**
- Identify **critical activities**
- Optimize the application of **resources**

Types of logic among the activities

- Mandatory/Hard logic
- Preferential/Preferred/Discretionary/soft logic



Developing an EPC Schedule

- Engage in an **iterative process**.
 - **Starting** with **Level I and II**, build the schedule.
 - **Check viability** (milestone comparisons, curves, etc.).
 - Build **Level III** with activity logic, resources, etc.
 - **Confirm** Level I and II, and then finalize Level III baseline.
- **Planners facilitate discussions** between Engineering, Procurement, Construction, and Startup team members, and interface between workgroups to optimize the overall schedule.

- The project's **principal sequences** and overall **strategy** is clear to the team.
- The project must have **basic boundaries** and **commitments identified**.
- The project needs a **workable** plan to accomplish its objectives and everyone **understands their role**.

Once everyone (including the Client) agrees on the Schedule, it becomes the **BASELINE** Schedule.

This the reference point from which the Project will be measured from and from which all **VARIANCES/ CLAIMS** will be analyzed.

A copy of this Schedule will be updated with actual progress and then it becomes the **Current Schedule** which will change as the Project evolves.

- Critical Path method
- Scheduling Terminology
- Estimate the duration
- Scheduling Consists of
- Develop the Schedule
- **The common Scheduling Failures**



The common Scheduling Failures

- Lack of **buy-in** by all project team members
- Lack of **planning**
- Poorly **defined activities**
- Inappropriate scheduling **detail**
- Inadequate **logic** ties

The common Scheduling Failures

- Poor **duration** estimating
- Lack of **information**
- **Failure to disseminate** the proper information to all parties
- **Excessive details** that overwhelm the sanity
- Updates **without analysis**

Thank You

