

Operating Systems

Eng. Eman Hamdy



IT111 - Introduction to
Information Technology



جامعة الجميع الذكية
EVERYONE'S SMART UNIVERSITY

Objective

After studying this chapter, the student should be able to:


- ☐ Understand the role of the operating system in a computer.
- ☐ Give the definition of an operating system.
- ☐ Understand the process of bootstrapping to load the operating system into memory.
- ☐ List the components of an operating system.
- ☐ Discuss the role of memory management in an operating system.
- ☐ Discuss the role of the process manager in an operating system.
- ☐ Discuss the role of the device manager in an operating system.
- ☐ Discuss the role of the file manager in an operating system.
- ☐ Understand the main features of three common operating systems: Unix, Linux, and Windows

7.1 INTRODUCTION

A computer is a system composed of two major components: hardware and software. Computer **hardware** is the physical equipment. **Software** is the collection of programs that allows the hardware to do its job.

Computer software is divided into two broad categories: the **operating system** and **application programs** (Figure 7.1). *Application* programs use the computer hardware to solve users' problems. The *operating system*, on the other hand, controls the access to hardware by users.

Figure 7.1 A computer system

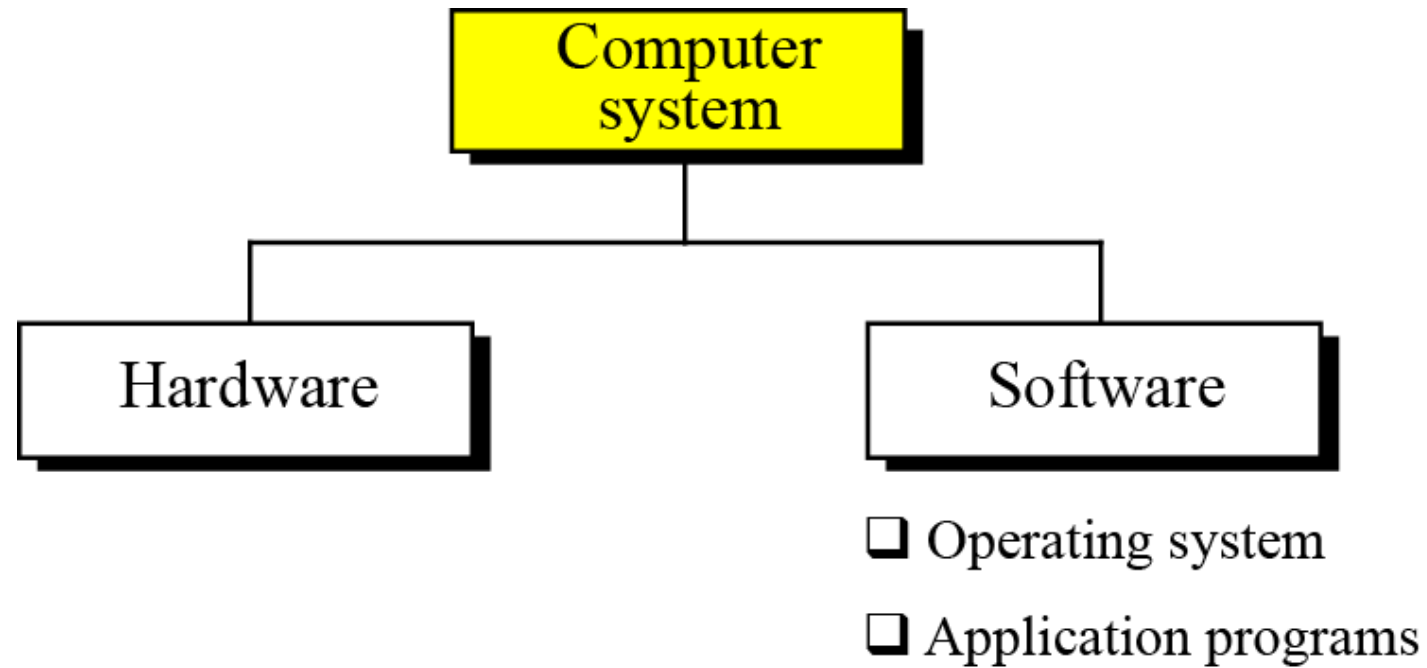

7.1.1 Operating System

An **operating system** is complex, so it is difficult to give a simple universal definition. Instead, here are some common definitions:

- ❑ An operating system is an interface between the hardware of a computer and the user (programs or humans).
- ❑ An operating system is a program (or a set of programs) that facilitates the execution of other programs.
- ❑ An operating system acts as a general manager supervising the activity of each component in the computer system.

An operating system is an interface between the hardware of a computer and the user (programs or humans) that facilitates the execution of other programs and the access to hardware and software resources.

Two major design goals of an operating system are:

- ☐ **Efficient use of hardware.**
- ☐ **Easy of use of resources.**

7.1.2 Bootstrap process


The operating system, based on the above definitions, provides supports for other programs. For example, it is responsible for loading other programs into memory for execution. However, the operating system itself is a program that needs to be loaded into the memory and be run. How is this dilemma solved?

Bootstrap process

The solution is a two-stage process. A very small section of memory is made of ROM and holds a small program called the **bootstrap program**. When the computer is turned on, in CPU the program counter is set to the first instruction of this bootstrap program and executes the instructions in this program.

This program is only responsible for loading the operating system itself, or that part of it required to start up the computer, into RAM memory. When loading is done, the program counter is set to the first instruction of the operating system in RAM.

Figure 7.2 The bootstrap process

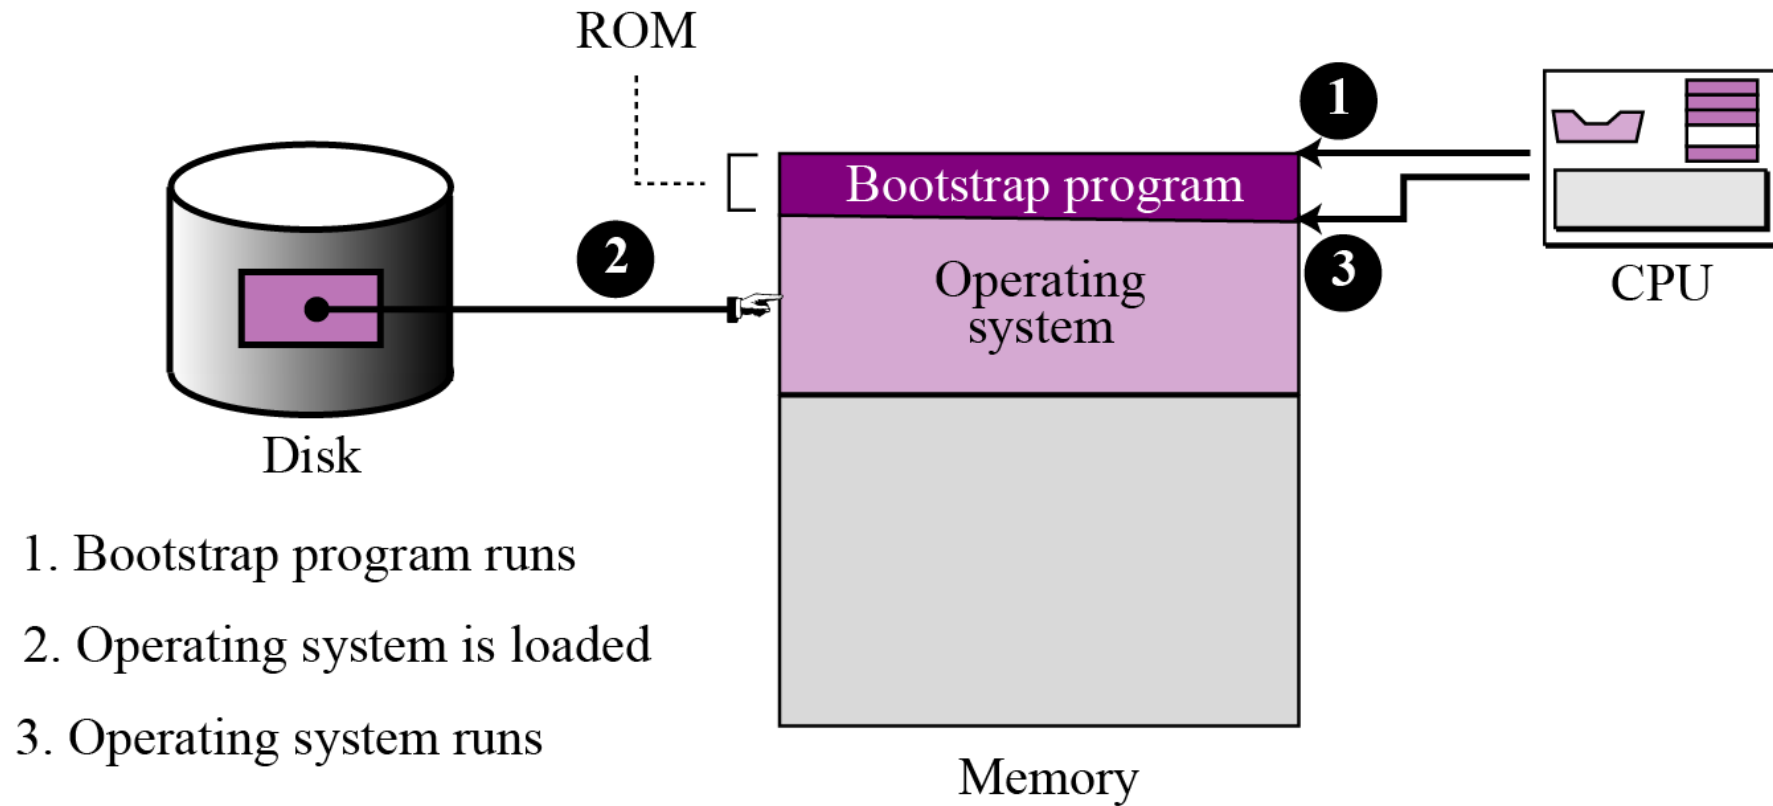

7-2 EVOLUTION

Operating systems have gone through a long history of evolution, which we summarize next.

7.2.1 Batch systems

Batch operating systems were designed in the 1950s to control mainframe computers.

Each program to be executed was called a job. A programmer who wished to execute a job sends a request to the operating system.

Operating system during this era were very simple: they only ensured that all computer resources transferred from one job to another



7.2.2 Time-sharing systems

To use computer system resources efficiently, *multiprogramming* was introduced. The idea is to hold several jobs in memory at a time, and only assign a resource to a job that needs it on the condition that the resource is available.

Multiprogramming brought the idea of **time sharing**: resources could be shared between different jobs, with each job being allocated a portion of time to use a resource.

Multiprogramming, and eventually timesharing, improved the efficiency of computer system tremendously.



7.2.3 Personal systems

When personal computers were introduced, there was a need for an operating system for this new type of computer. During this era, single-user operating systems such as **DOS (Disk Operating System)** were introduced.

7.2.4 Parallel systems

The need for more speed and efficiency led to the design of **parallel systems**: multiple CPUs on the same machine. Each CPU can be used to serve one program or a part of a program, which means that many tasks can be accomplished in parallel instead of serially. The operating systems required for this are more complex than those that support single CPUs.



7.2.5 Distributed systems

Networking and internetworking have created a new dimension in operating systems. A job that was previously done on one computer can now be shared between computers that may be thousands of miles apart. Distributed systems combine features of the previous generation with new duties such as controlling security.

7.2.5 Real-time systems


A real-time system is expected to do a task within specific time constraint. They are used with real-time applications, which monitor, responds to, or control external processes or environments.



7-3 COMPONENTS

Today's operating systems are very complex. An operating system needs to manage different resources in a computer system. It resembles an organization with several managers at the top level. Each manager is responsible for managing their department, but also needs to cooperate with others and coordinate activities. A modern operating system has at least four duties: **memory manager, process manager, device manager, and file manager.**

Figure 7.3 Components of an operating system

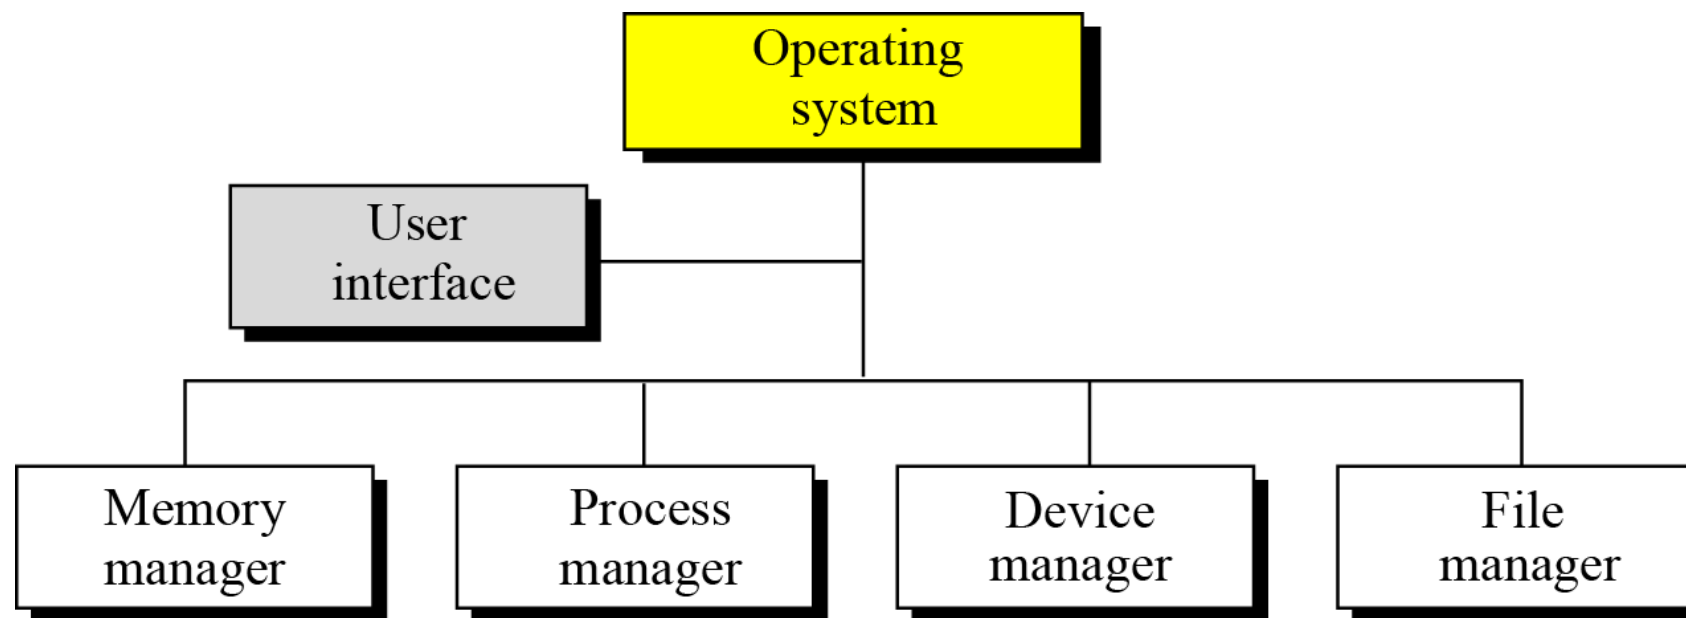

7.3.1 User interface

Each operating system has a **user interface**, a program that accepts requests from users (processes) and interprets them for the rest of the operating system. A user interface in some operating systems, such as UNIX, is called a **shell**. In others, it is called a **window** to denote that it is menu driven and has a GUI (graphical user interface) component.

7.3.2 Memory Management


One of the responsibilities of a modern computer system is **memory management**. Although the memory size of computers has increased tremendously in recent years, so has the size of the programs and data to be processed. Memory allocation must be managed to prevent applications from running out of memory. Operating systems can be divided into two broad categories of memory management: *monoprogramming* and *multiprogramming*.



Monoprogramming

In **monoprogramming**, most of the memory capacity is dedicated to a single program; only a small part is needed to hold the operating system. In this configuration, the whole program is in memory for execution. When the program finishes running, the program area is occupied by another program.

Figure 7.4 Monoprogramming

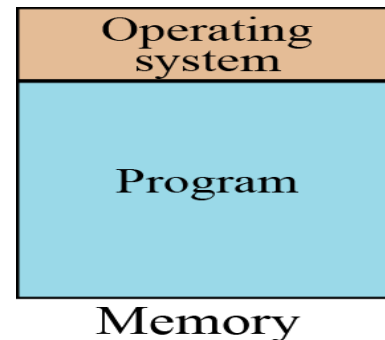

Multiprogramming

In multiprogramming, more than one program is in memory at the same time, and they are executed concurrently, with the CPU switching rapidly between the programs.

Figure 7.5 Multiprogramming

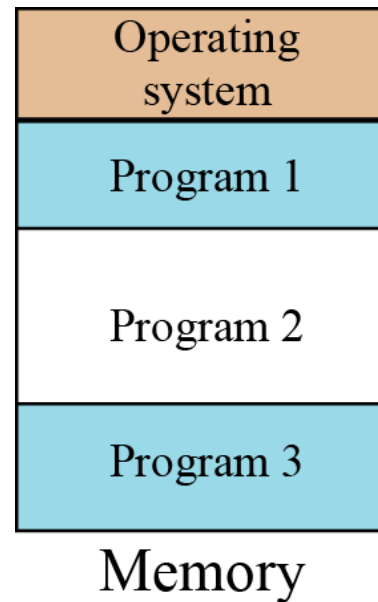


Figure 7.6 Categories of multiprogramming



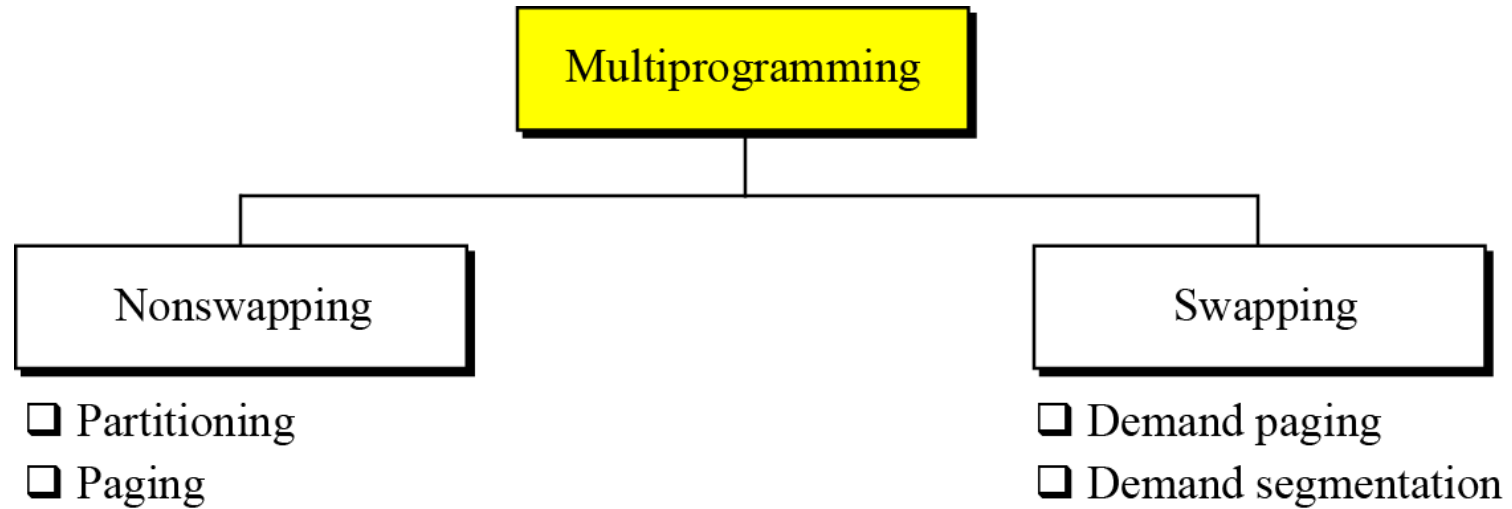


Figure 7.7 Partitioning

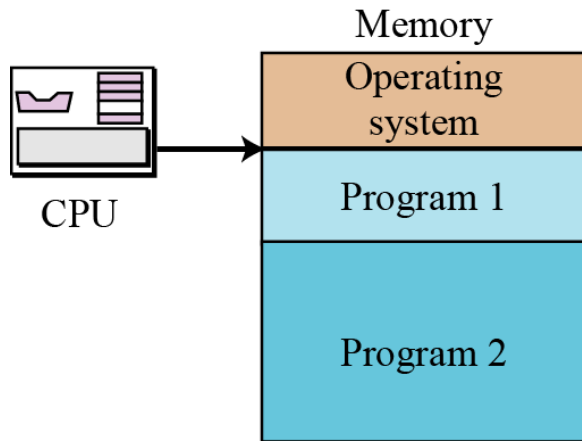

a. CPU starts executing program 1

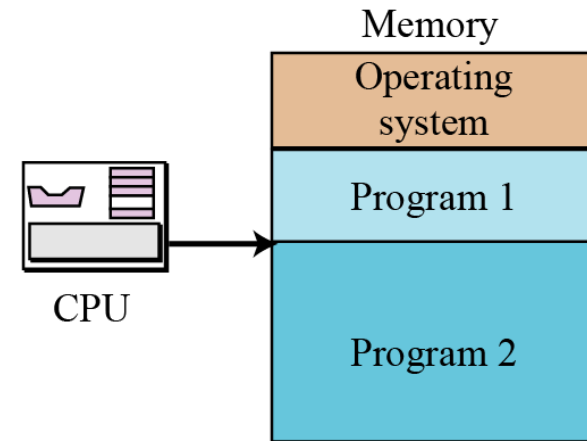

b. CPU starts executing program 2

Figure 7.8 Paging

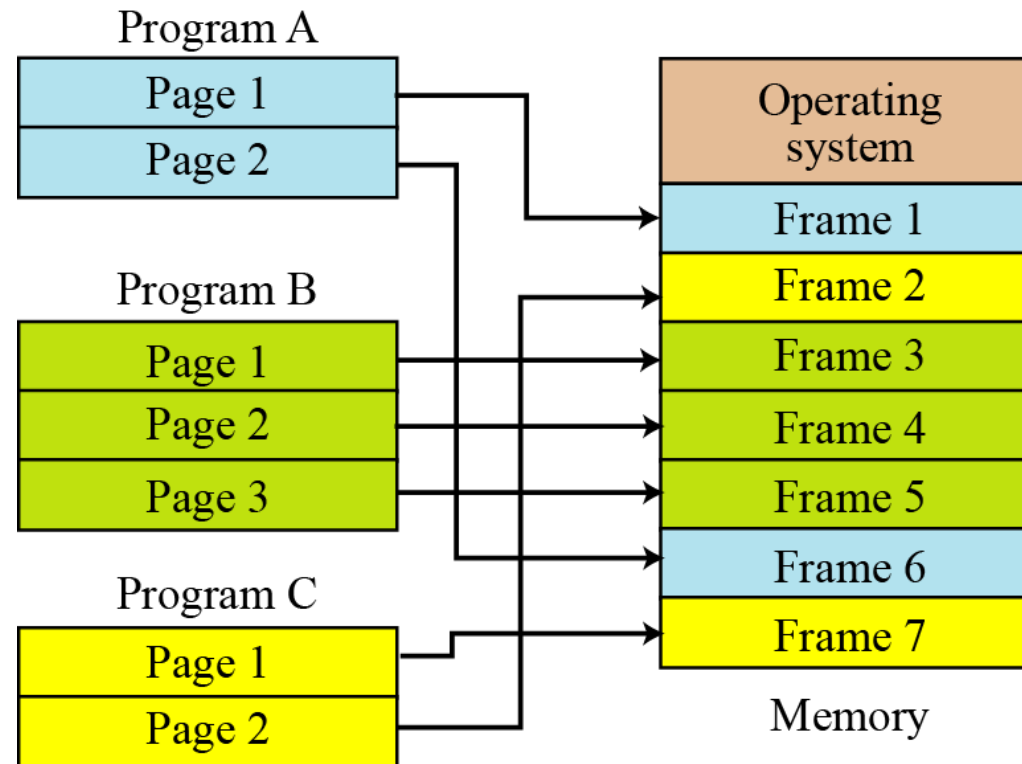


Figure 7.9 Demand paging

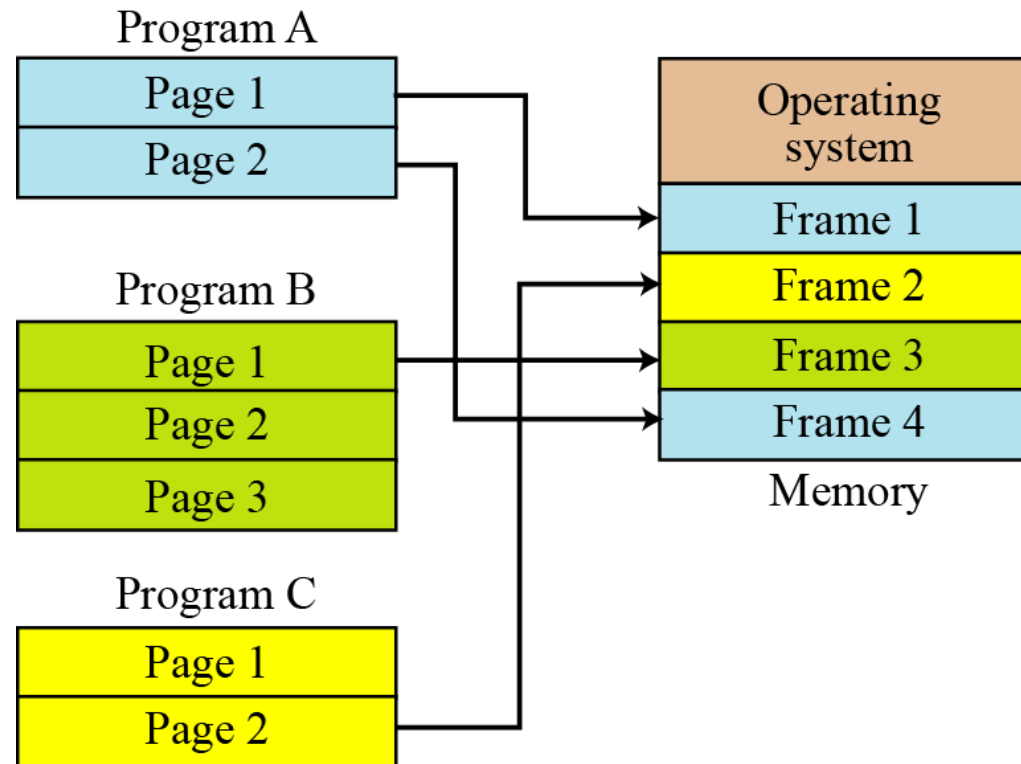


Figure 7.10 Demand segmentation


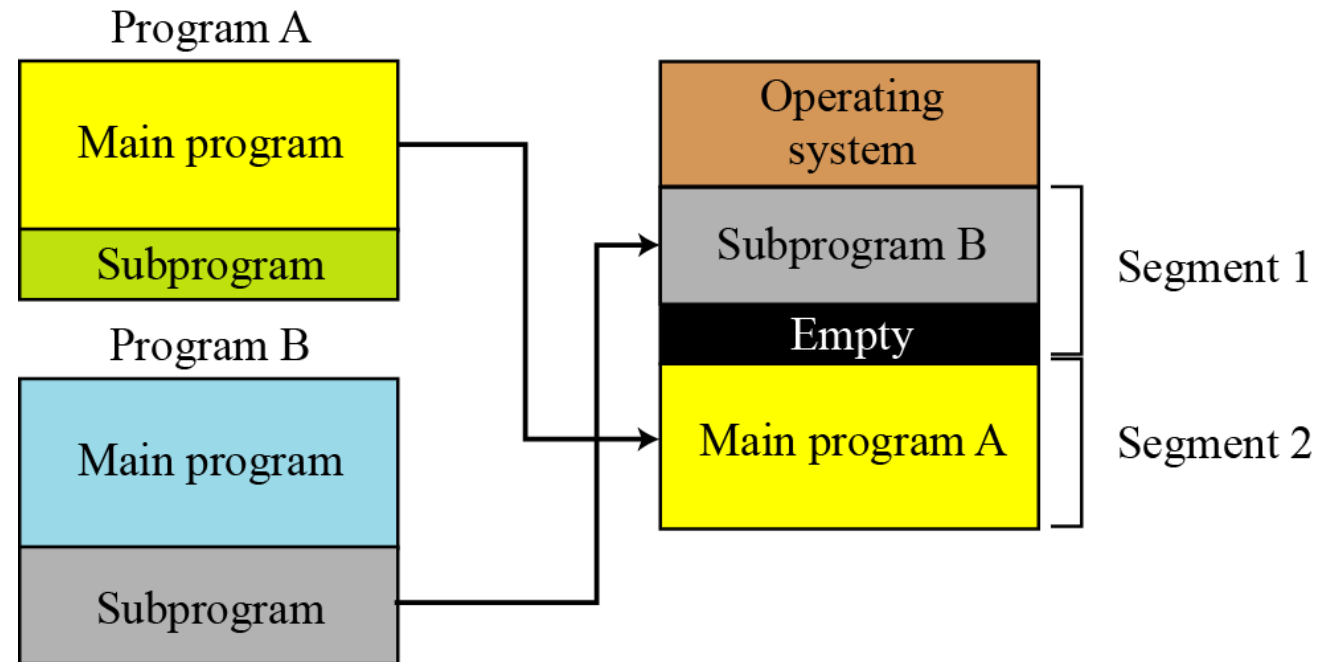



Figure 7.6 Categories of multiprogramming

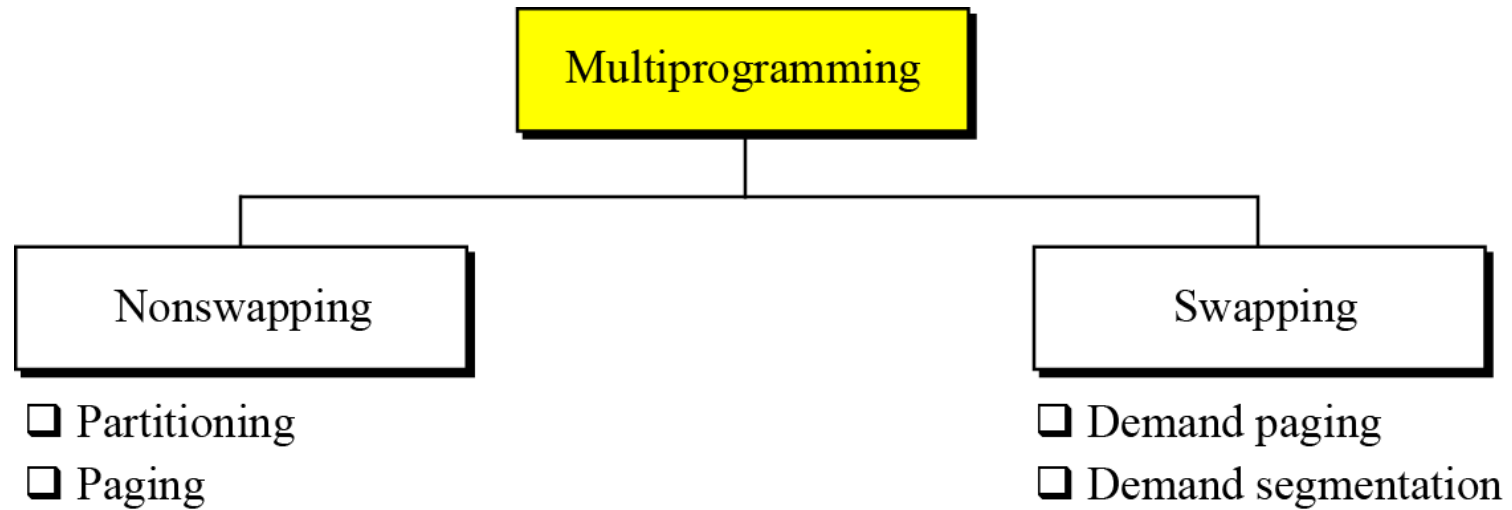

Virtual memory

Demand paging and demand segmentation mean that, when a program is being executed, part of the program is in memory and part is on disk. This means that, for example, a memory size of 10 MB can execute 10 programs, each of size 3 MB, for a total of 30 MB. At any moment, 10 MB of the 10 programs are in memory and 20 MB are on disk. There is therefore an actual memory size of 10 MB, but a virtual memory size of 30 MB. Figure 7.11 shows the concept. **Virtual memory**, which implies demand paging, demand segmentation, or both, is used in almost all operating systems today.

Figure 7.11 Virtual memory

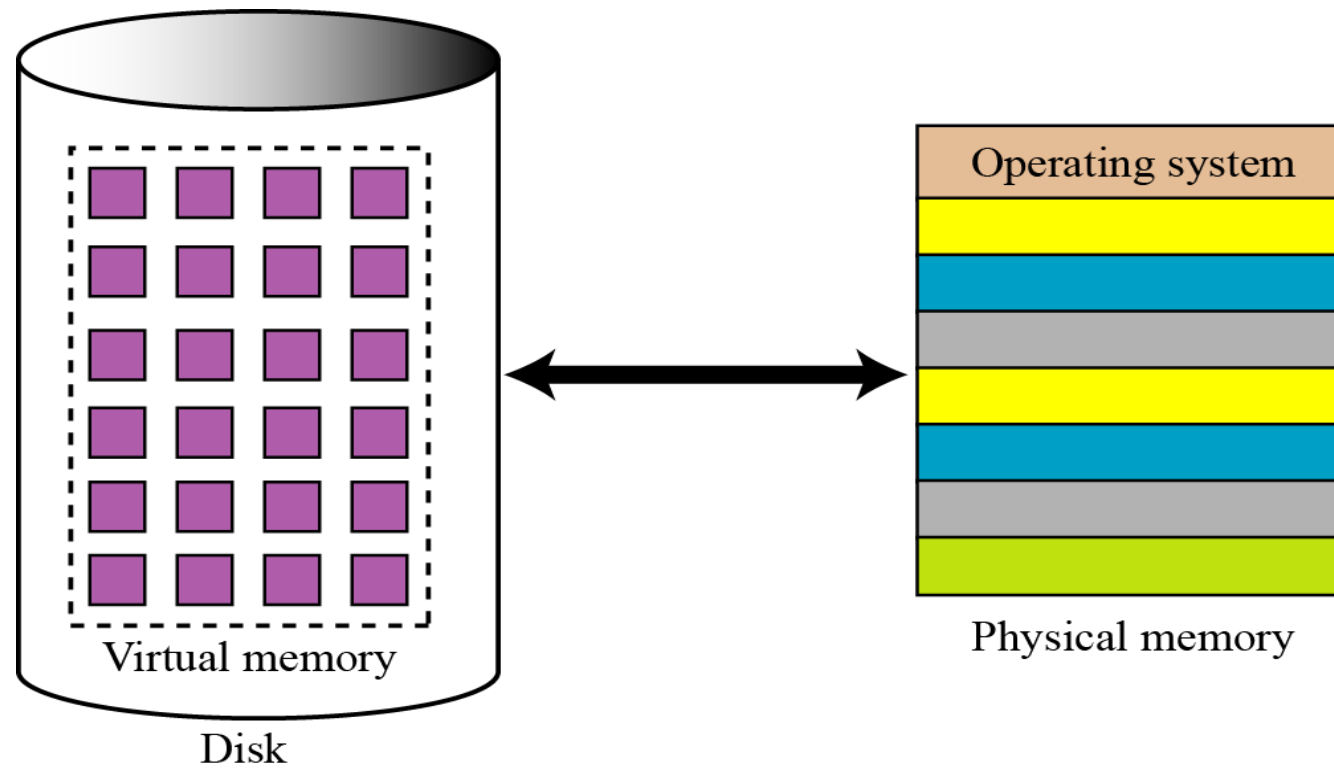

7.3.3 Process manager

A second function of an operating system is process management, but before discussing this concept, we need to define some terms.


Program, job, and process

Modern operating systems use three terms that refer to a set of instructions: program, job, and process. Although the terminology is wide and varies from one operating system to another.

State diagrams

The relationship between a program, a job, and a process becomes clearer if we consider how a program becomes a job and how a job becomes a process. This can be illustrated with a state diagram that shows the different states of each of these entities.

State diagram with boundaries

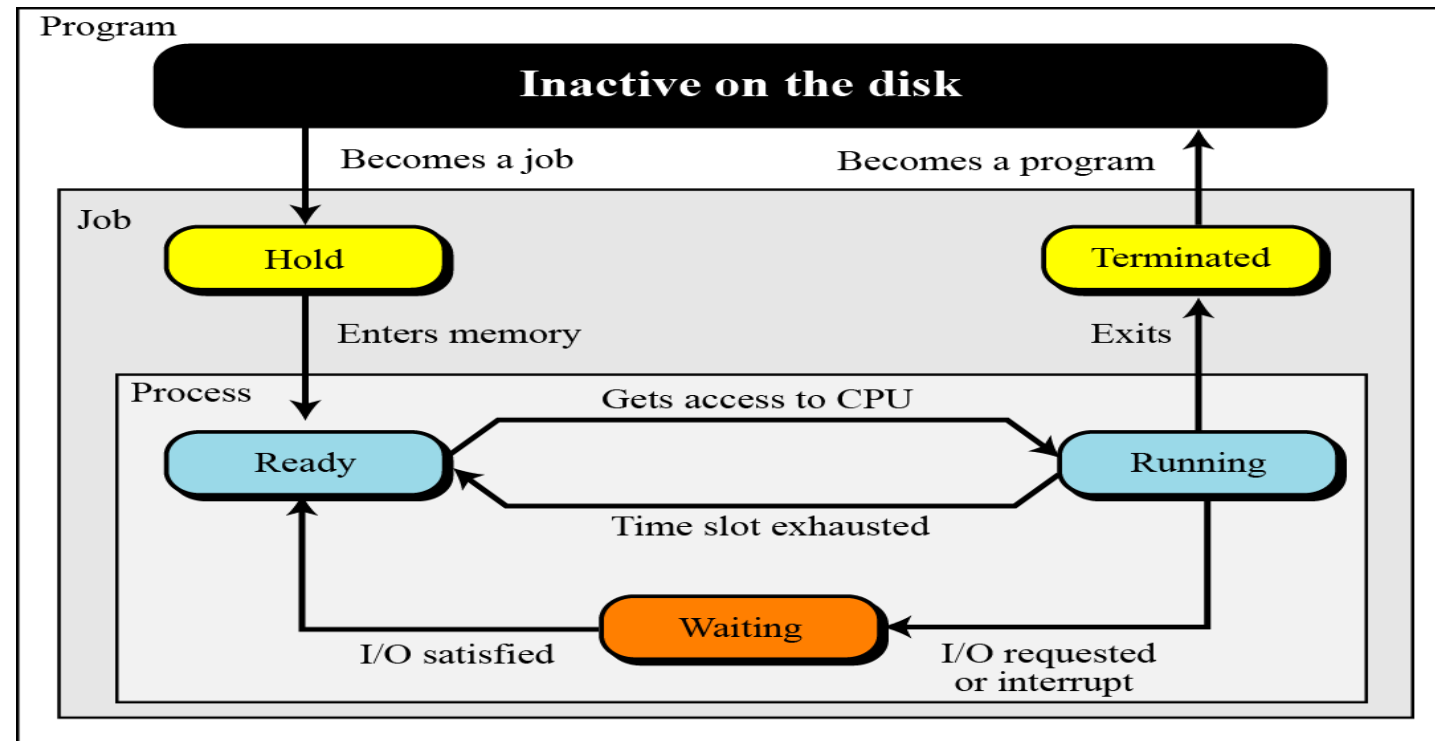


Queuing

Our state diagram shows one job or process moving from one state to another. In reality, there are many jobs and many processes competing with each other for computer resources. To handle multiple processes and jobs, the process manager uses queues (waiting lists).

A job control block or process control block is associated with each job or process. This is a block of memory that stores information about that job or process. The process manager stores the job or process control block in the queues instead of the job or process itself.



Queues for process management

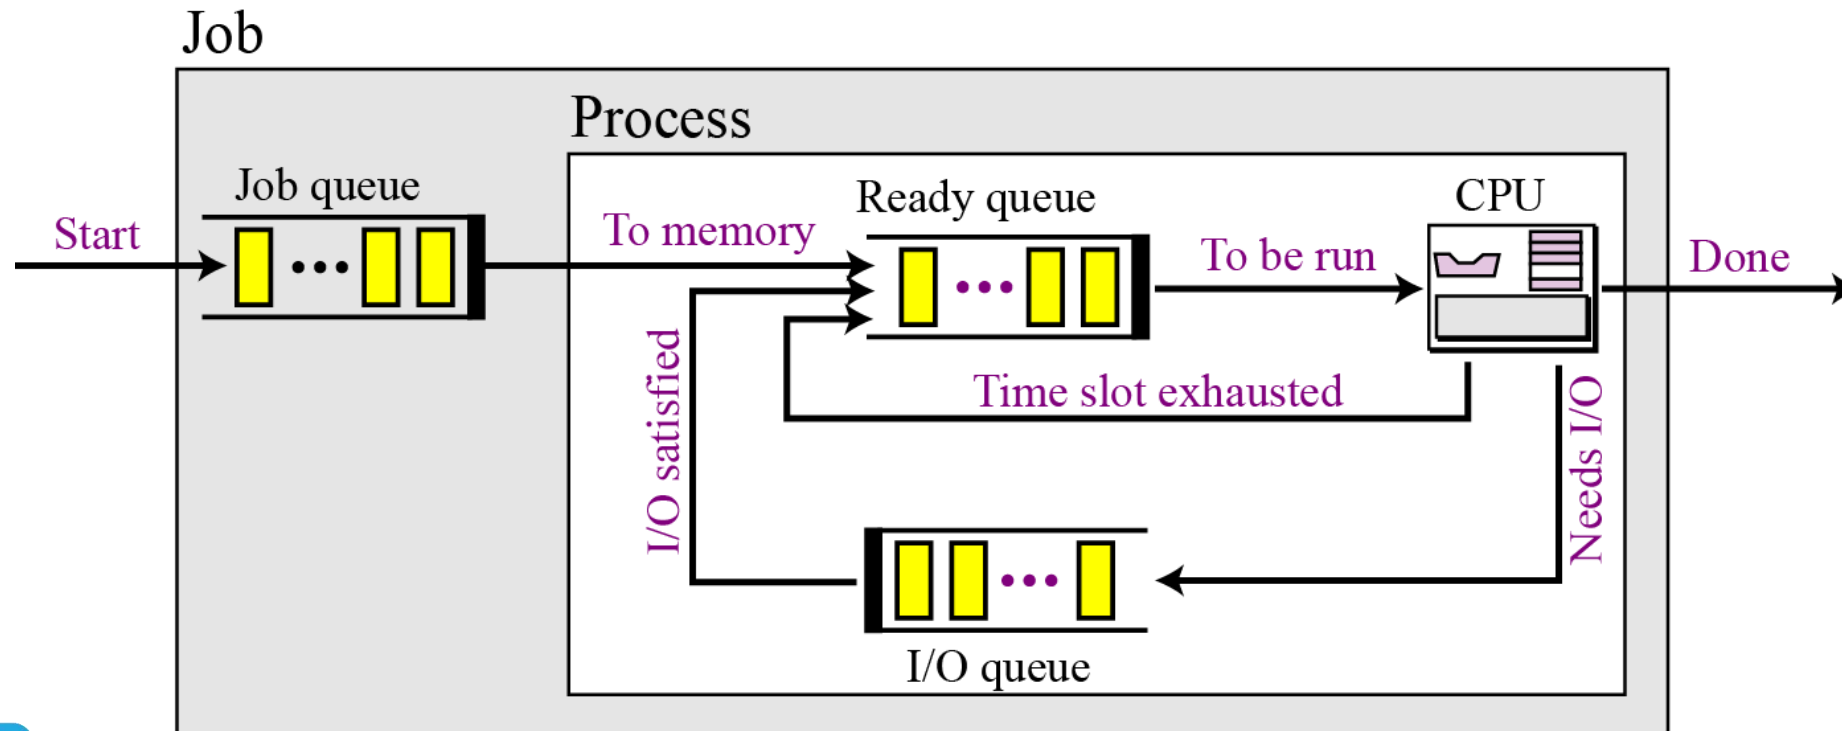

Device manager

The device manager, or input/output manager, is responsible for access to input/ output devices. There are limitations on the number and speed of input/output devices in a computer system.

- ☐ The device manager monitors every input/output device constantly to ensure that the device is functioning properly.
- ☐ The device manager maintains a queue for each input/output device or one or more queues for similar input/output devices.
- ☐ The device manager controls the different policies for accessing input/output devices.



7.3.4 File manager

Operating systems today use a **file manager** to control access to files. A detailed discussion of the file manager also requires advanced knowledge of operating system principles and file access concepts that are beyond the scope of this book.

- ❑ **The file manager controls access to files.**
- ❑ **The file supervises the creation, deletion, and modification of files.**
- ❑ **The file manager controls the naming of files.**
- ❑ **The file manager supervises the storage of files.**
- ❑ **The file manager is responsible for archiving and backups.**



7-4 A SURVEY OF OPERATING SYSTEMS

In this section we introduce some popular operating systems and encourage you to study them further. We have chosen three operating systems that are familiar to most computer users: UNIX, Linux, and Windows.



Thank You 😊



جامعة الزكية
EVERYONE'S SMART UNIVERSITY